



# Samsung Galaxy Camera Screen Replacement

These are the steps for replacing the Screen.

Written By: Richard Hicks






## TOOLS:


- [Phillips #0 Screwdriver](#) (1)
  - [iFixit Opening Tools](#) (1)
-

## Step 1 — Screen

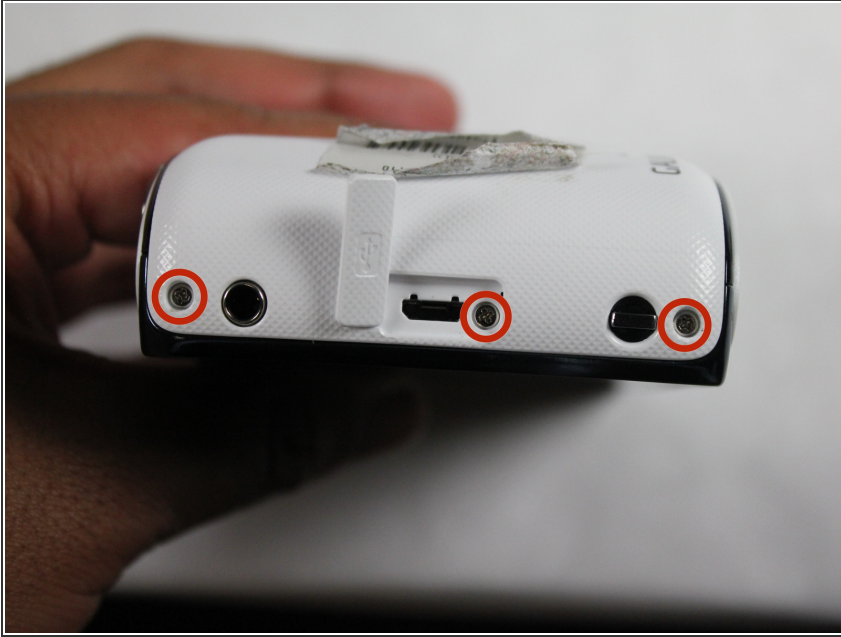

- Begin removing the 3/16" screws for the device.

## Step 2

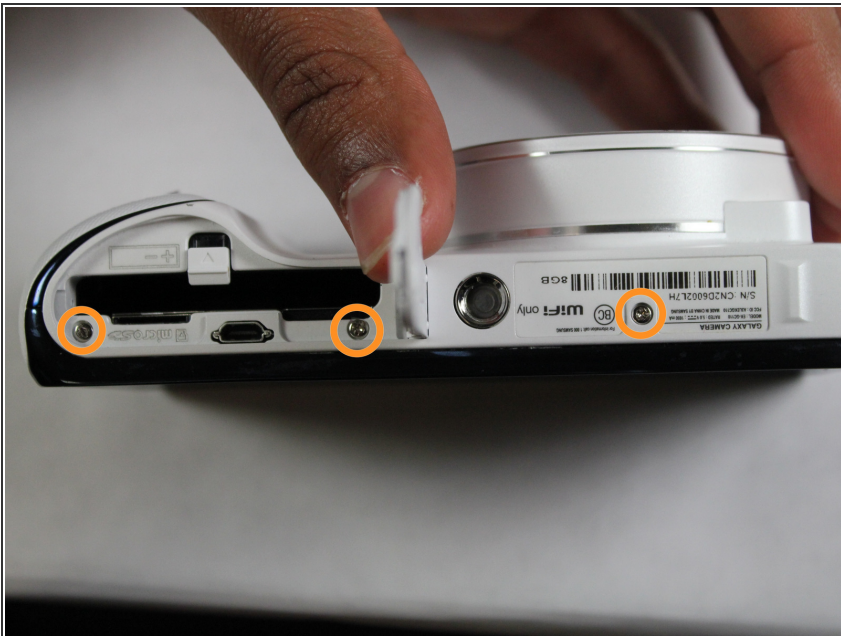

- Turn the device and remove the additional 3/16" screws.




### Step 3



- Turn the device and remove the additional 3/16" screw.

### Step 4

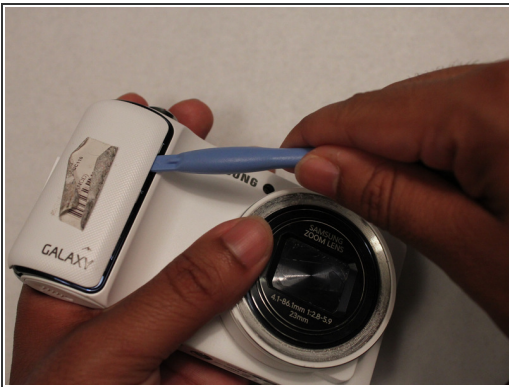


- Take the white cover plate off.

## Step 5



- Using the plastic opening tools, pry open the camera from the bottom.
- ⓘ This may require a moderate use of force because of the sealing glue.

## Step 6

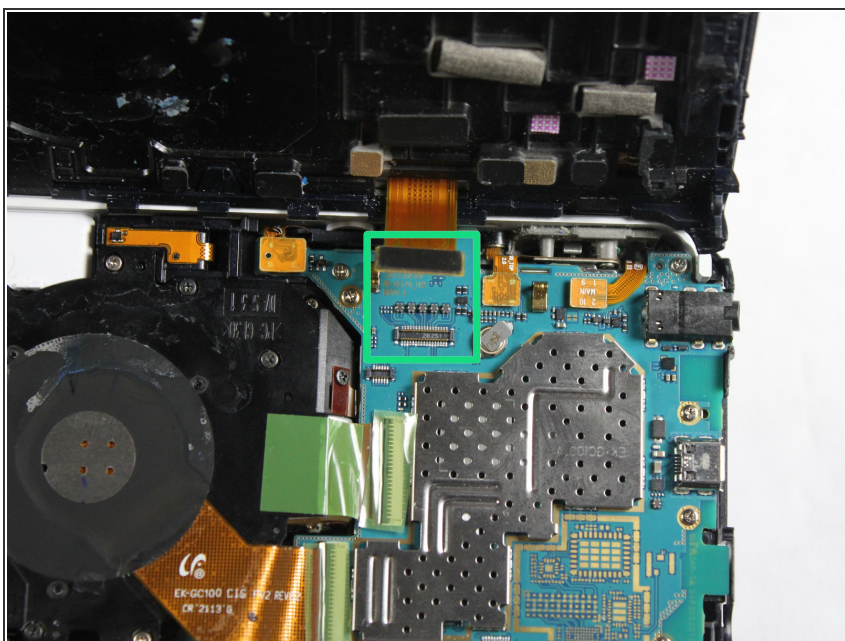

- Gently pull the connector away from the motherboard.

To reassemble your device, follow these instructions in reverse order.

This document was last generated on 2017-08-15 08:31:02 PM.